

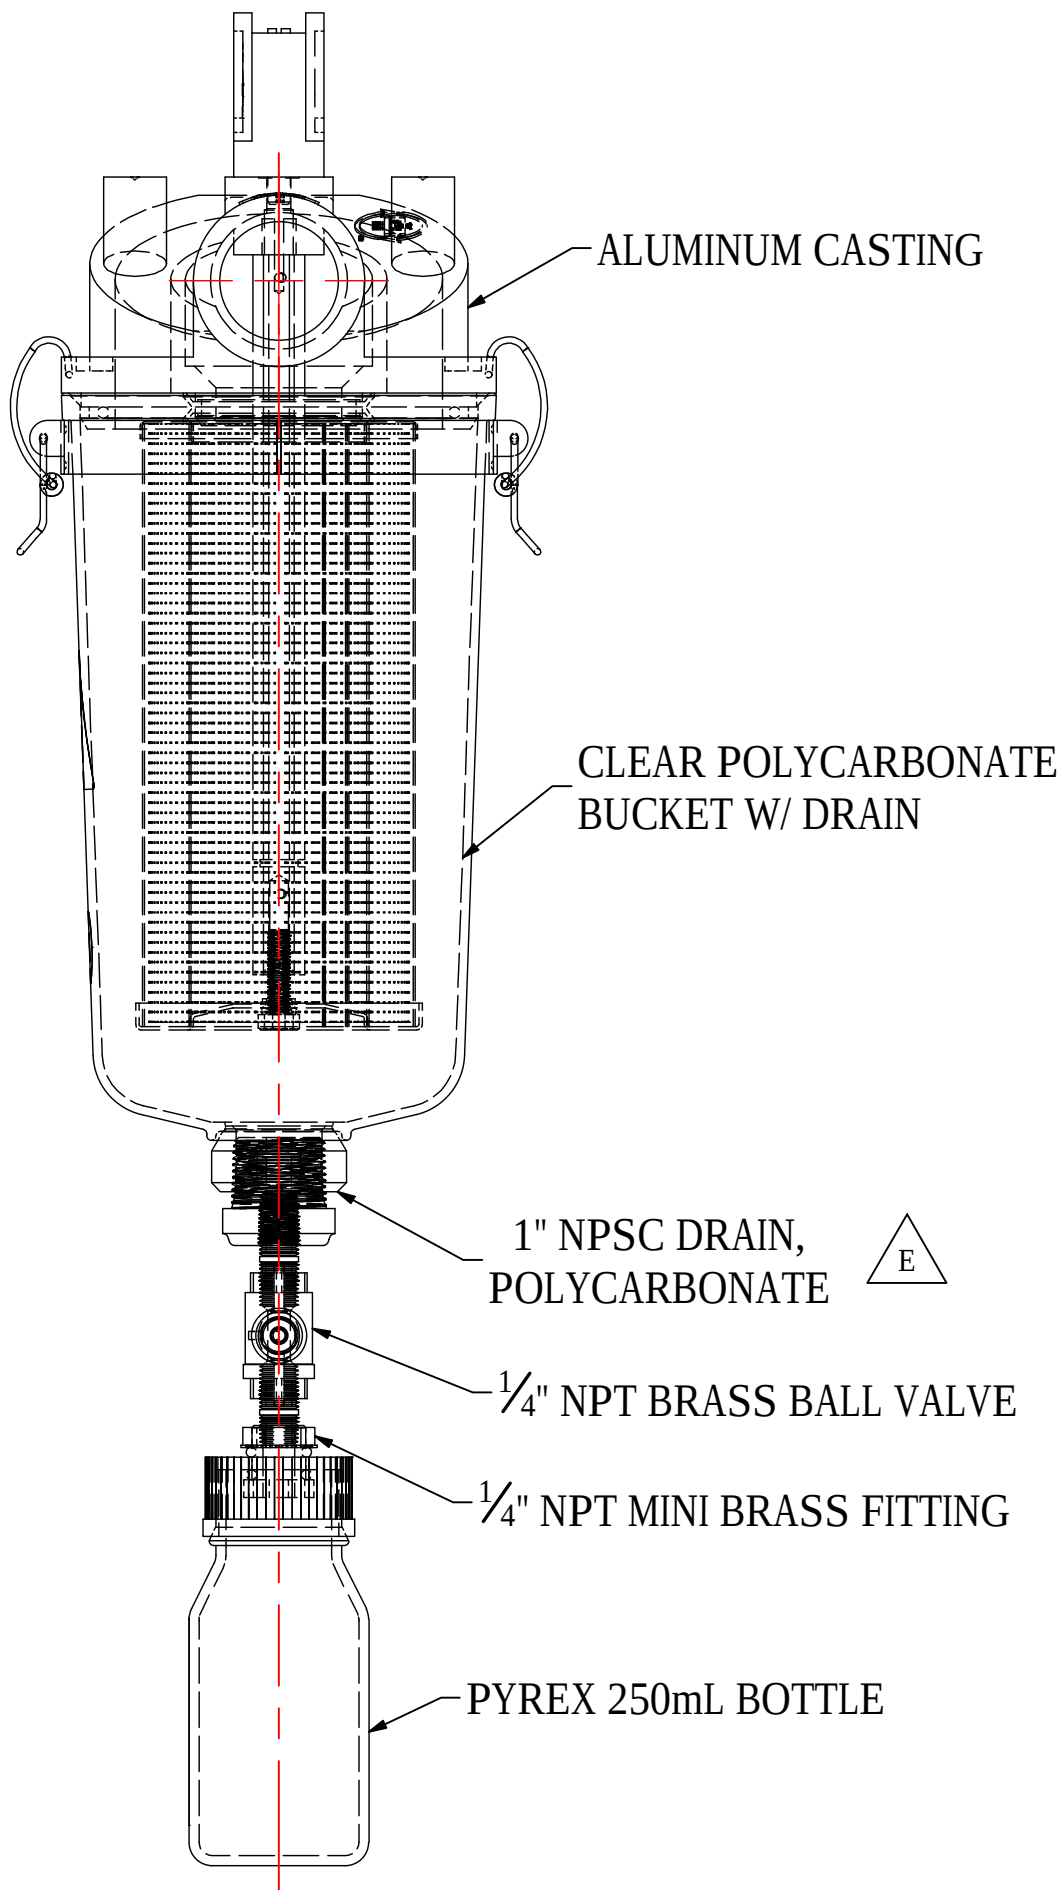


REV	DESCRIPTION	ECN #	CHG BY	DATE	APP'D
A	CHANGED TO NYLON FITTINGS	PER MC	JCB	03/28/12	M.C
B	UPDATED DRAIN TO BUCKET/ BOTTLE ASSEMBLY	PER Q.C.	EZR	03/04/13	CRW
C	UPDATED TO 3D	-	JEB	09/25/17	DDH
D	UPDATED DRAIN, WAS 1/4" NPT BRASS	15705	TAS	03/07/19	NAD
E	UPDATED DRAIN, WAS 316 SS	21562	EZR	03/24/21	TAS

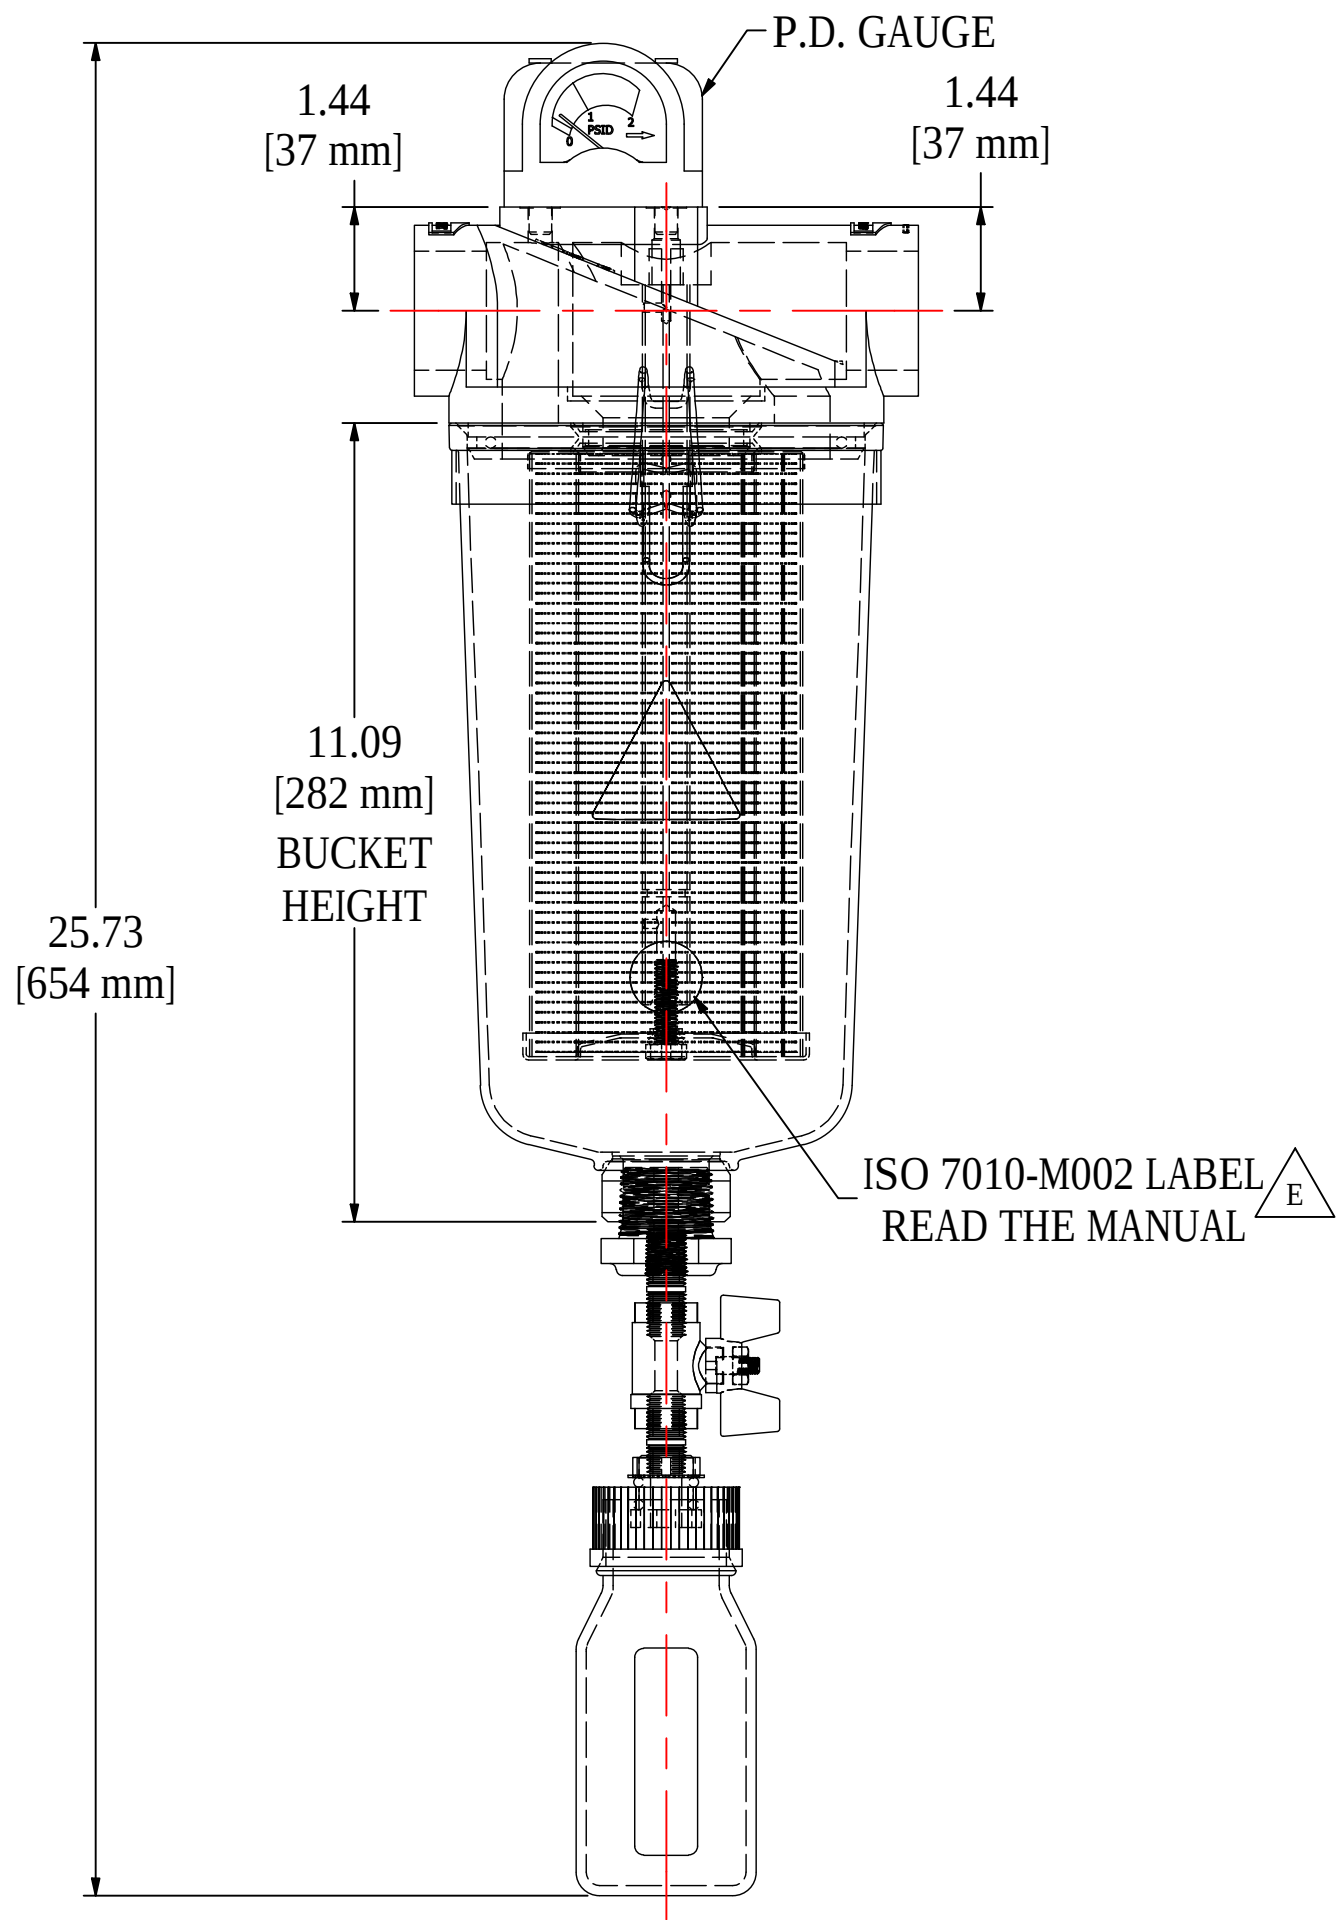

ELEMENT SPECS		
PART NUMBER	UL896	
MATERIAL	ULPA	
FLOW RATE	48 CFM	82 m³/hr
SURFACE AREA	4.9 ft²	0.5 m²
I.D.	2.38"	60mm
O.D.	3.98"	101mm
HEIGHT	8.44"	214mm

MODEL #: HV-UL896-126C		MATERIAL: VARIOUS		FINISH: VARIOUS	
MODEL NUMBER: HV-UL896-126C					SHEET: 1 OF 1
DESCRIPTION: HV-UL896-126C, BOTTLE, BALL VALVE, PD GAUGE					
PROJECT: SD18006		DRAWN BY: JCB DATE: 3/26/2012		APPROVED BY: CRW DATE: 3/26/2012	
				REV: C	

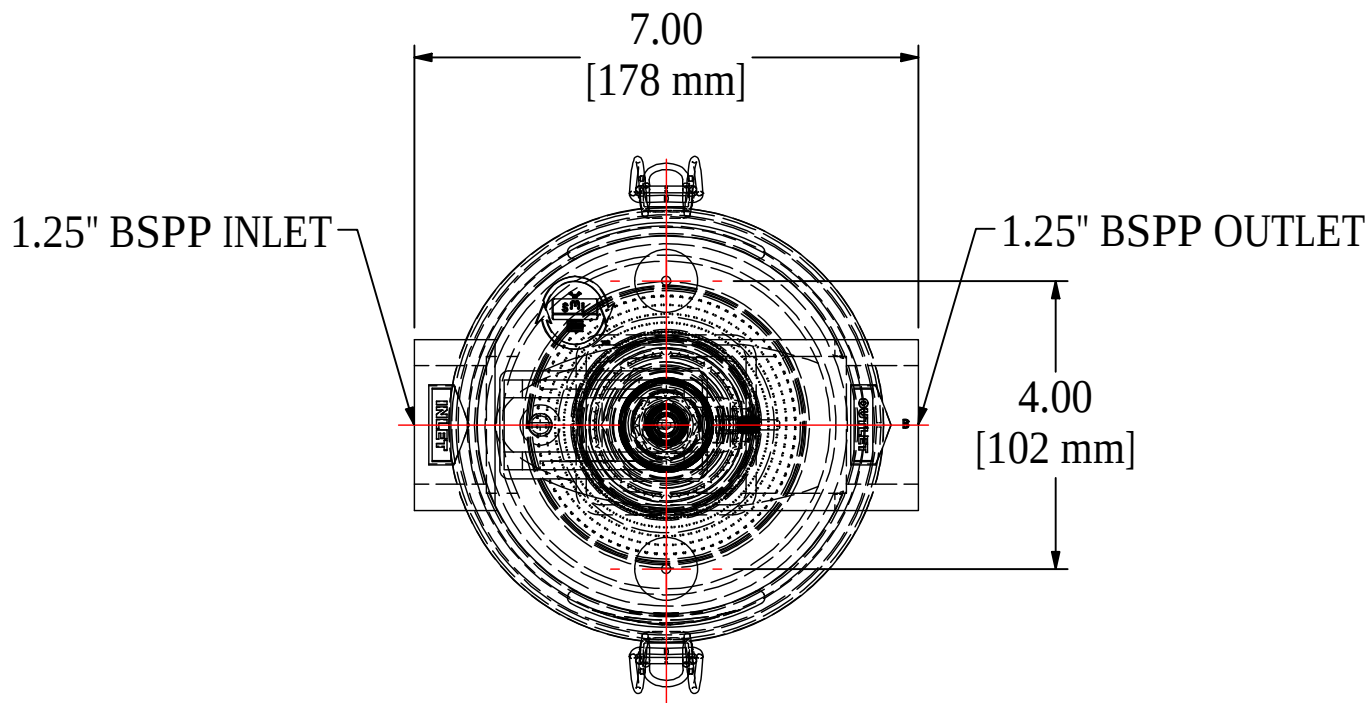

SOLBERG
Filtration • Separation • Silencing
630.773.1363 • www.solbergmfg.com

THE INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND THE PROPERTY OF SOLBERG MANUFACTURING INC. AND IT IS FURNISHED TO YOU WITH THE EXPRESS UNDERSTANDING THAT IT WILL NOT BE REPRODUCED, COPIED IN ANY MANNER, LOANED OR OTHERWISE TRANSFERRED TO OTHERS ENTIRELY OR IN PART, NOR USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT WAS FURNISHED. IT WILL BE RETURNED UPON REQUEST TO SOLBERG MANUFACTURING INC. THE ABOVE RESTRICTION IS IN ADDITION TO, AND DOES NOT IN ANY WAY ALTER, ANY OTHER RESTRICTIONS WHICH MAY APPLY TO THE INFORMATION CONTAINED HEREIN.

TOLERANCES
DIMENSIONS ARE FOR REFERENCE ONLY. ALL DIMENSIONS ARE SUBJECT TO CHANGE UPON PRODUCTION.
UNLESS OTHERWISE SPECIFIED:
-DIMENSIONS ARE IN INCHES
-REF: APPROXIMATE DIMENSIONS, NO TOLERANCES APPLY
-FINISH: BREAK EDGES TO .005-.020 RADIUS/CHAMFER