

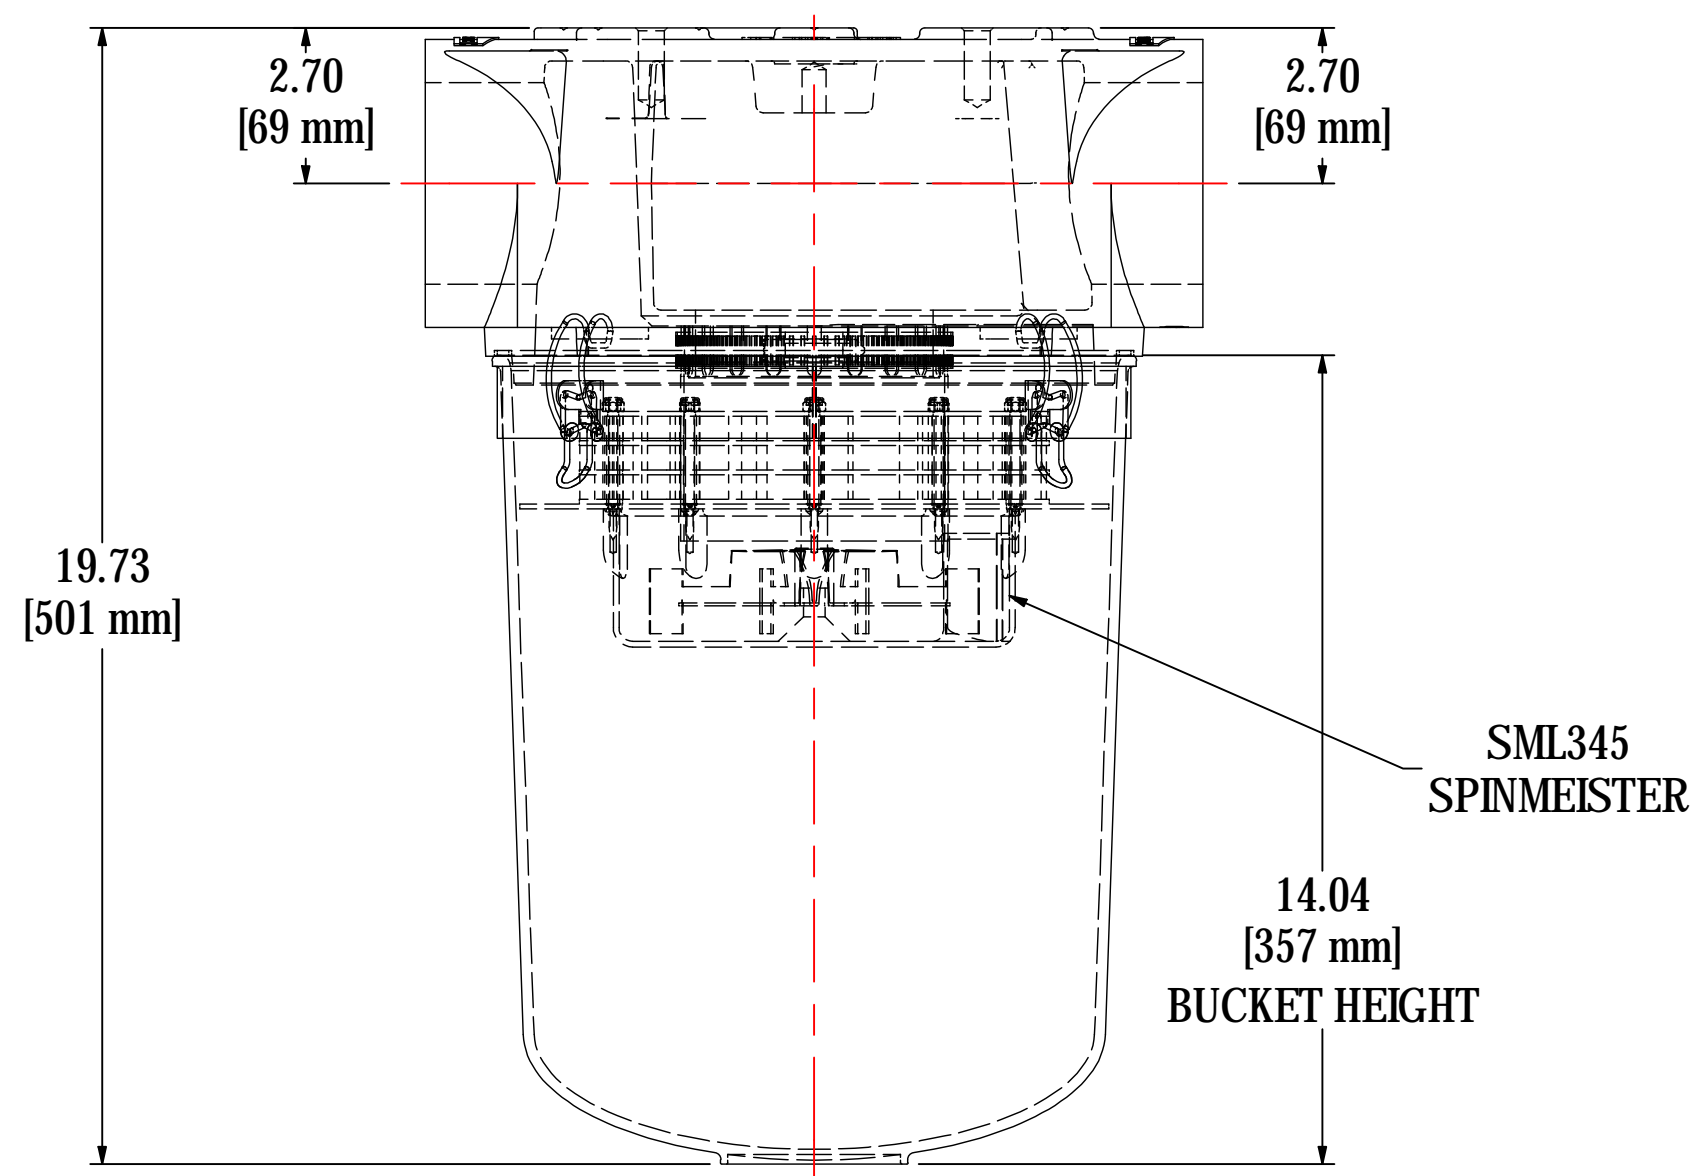


REV	DESCRIPTION	ECN #	CHG BY	DATE	APP'D
A	UPDATED CT CASTING	18547	CMA	04/28/10	CRW
B	ADDED BOLT HOLE CALL OUT	-	JCB	06/12/12	-
C	CONVERTED TO 3D	-	EZR	04/26/16	NAD
D	UDPATED LAYOUT & ADDED NOTE 1	18826	TAS	03/31/20	NAD

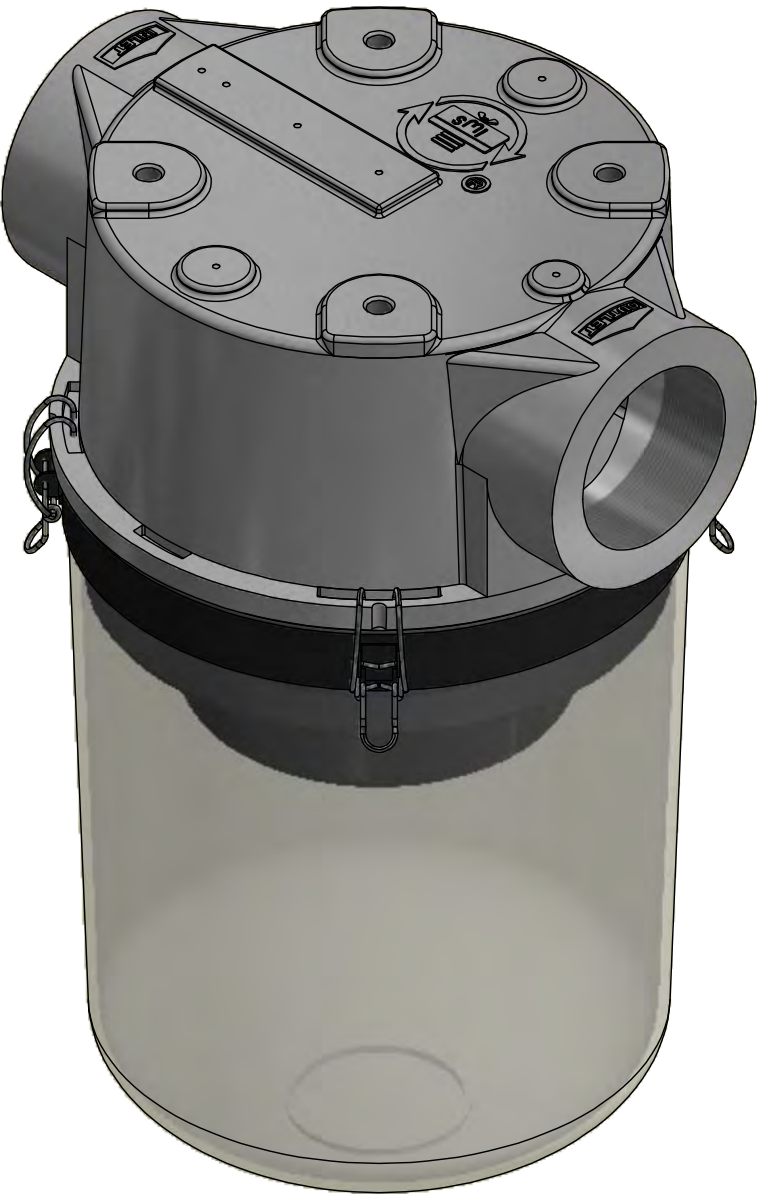

NOTES & SPECIFICATIONS:

1. UNIT RATED FOR 100 - 200 SCFM (170 - 340 m³/hr).

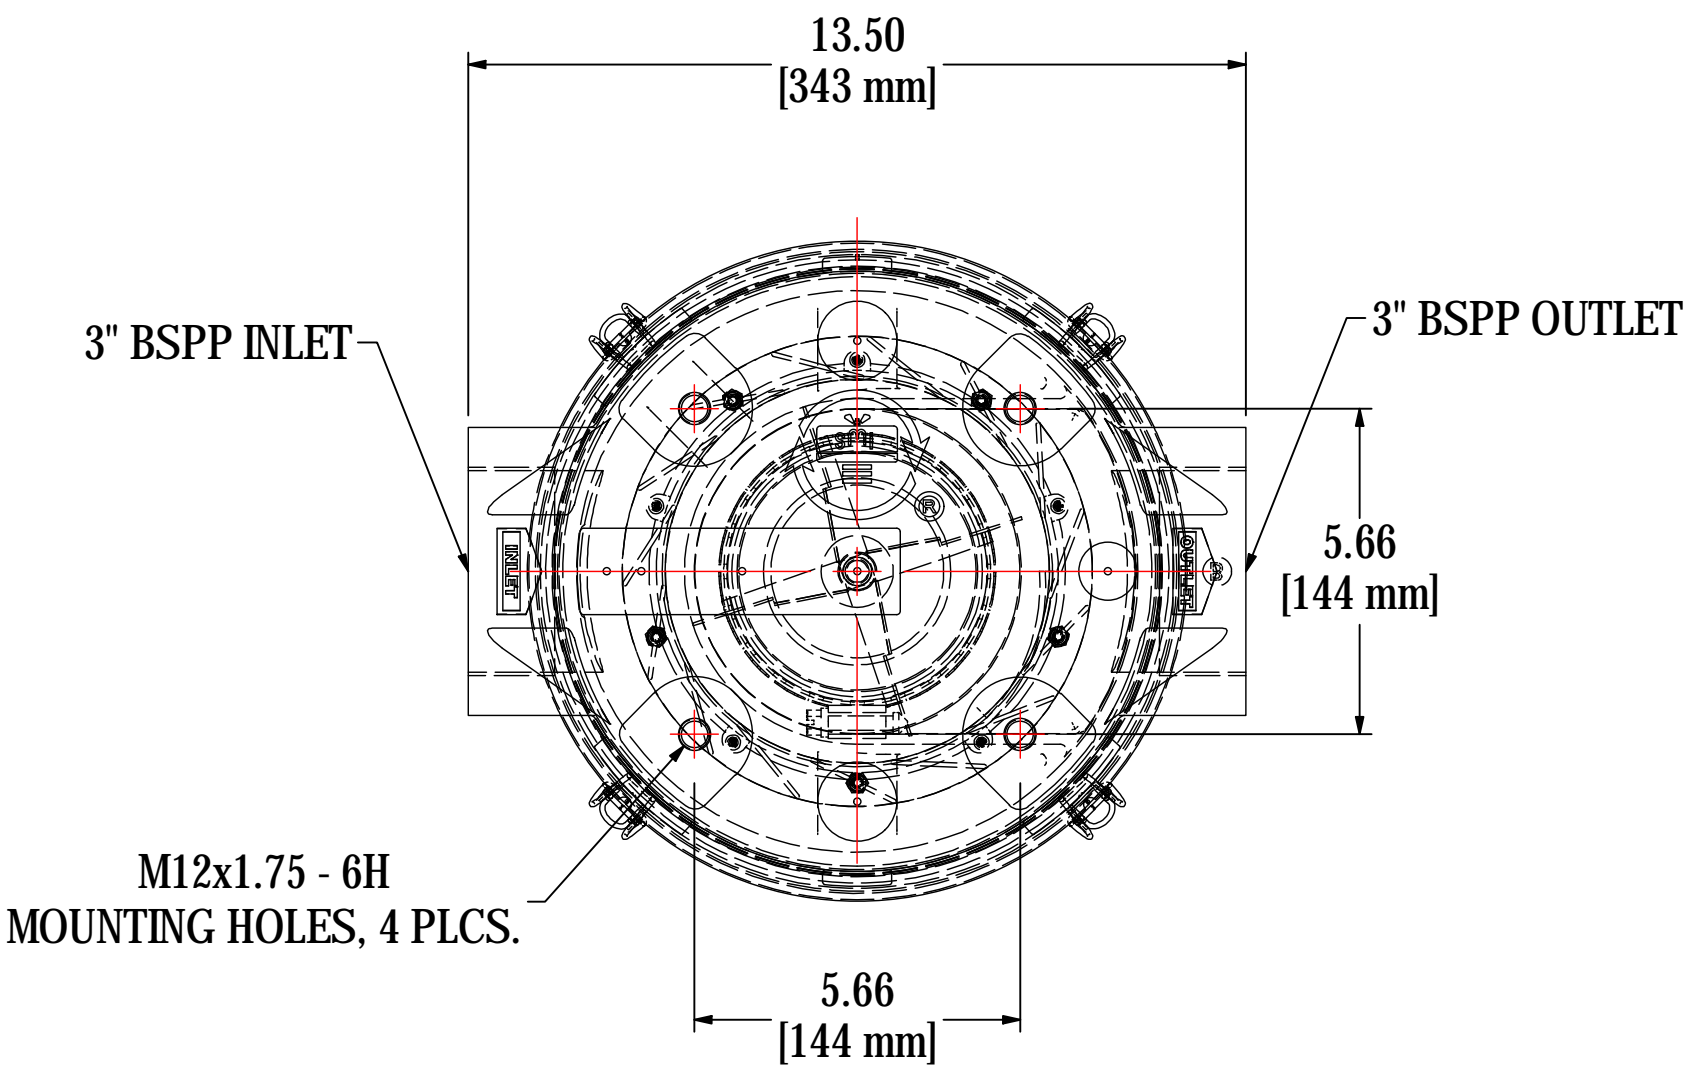

SOLBERG®
Filtration • Separation • Silencing
630.773.1363 • www.solbergmfg.com

THE INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND THE PROPERTY OF SOLBERG MANUFACTURING INC. AND IT IS FURNISHED TO YOU WITH THE EXPRESS UNDERSTANDING THAT IT WILL NOT BE REPRODUCED, COPIED IN ANY MANNER, LOANED OR OTHERWISE TRANSFERRED TO OTHERS ENTIRELY OR IN PART, NOR USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT WAS FURNISHED. IT WILL BE RETURNED UPON REQUEST TO SOLBERG MANUFACTURING INC. THE ABOVE RESTRICTION IS IN ADDITION TO, AND DOES NOT IN ANY WAY ALTER, ANY OTHER RESTRICTIONS WHICH MAY APPLY TO THE INFORMATION CONTAINED HEREIN.

TOLERANCES
DIMENSIONS ARE FOR REFERENCE ONLY. ALL DIMENSIONS ARE SUBJECT TO CHANGE UPON PRODUCTION.

UNLESS OTHERWISE SPECIFIED:
-DIMENSIONS ARE IN INCHES
-REF: APPROXIMATE DIMENSIONS, NO TOLERANCES APPLY
-FINISH: BREAK EDGES TO .005-.020 RADIUS/CHAMFER

MODEL #: ST-SML345-301C		MATERIAL: CAST ALUMINUM/PLASTIC		FINISH: NONE	
MODEL NUMBER: ST-SML345-301C					SHEET: 1 OF 1
DESCRIPTION: ST-SML345-301C, CLEAR BUCKET					
PROJECT: SD13616		DRAWN BY: CRW DATE: 5/27/2008		APPROVED BY: M.C. DATE: 5/27/2008	
				REV: D	